

## 35 500 000 GROHE RAPIDO T THERMOSTATIC MIXER FOR CONCEALED INSTALLATION




### PRODUCT DESCRIPTION

- Colour: chrome
- for use with Grohtherm Special and Grohtherm F
- without finishing trim set
- flat installation depth 70 - 95 mm
- easy to install, premounted and tested unit
- GROHE TurboStat compact cartridge with wax thermoelement
- two top outlets 1/2"
- high flowrate up to 50l/min. by use of three outlets
- bottom outlet below 1/2" - separate stop valve required
- safe to install, stable built-in-box and protective cap
- fixation options for solid walls and dry cladding
- wall sealing
- Aquadimmer-diverter for bath mixer or stopvalve for shower mixer in finishing trim set
- body made of DR brass
- built-in non-return valves and dirt strainers
- GROHE Water Saving - Less water, perfect flow
- minimum pressure 1,0 bar



## 35 500 000 **GROHE RAPIDO T THERMOSTATIC MIXER FOR CONCEALED INSTALLATION**

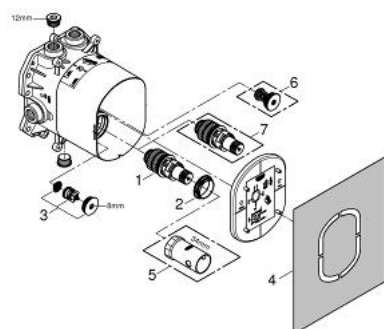

### **UNITS PER PACKAGE**, November 2005 – now

- 1: Thermostatic compact cartridge 3/4" (Order-nr. 47483000)
- 2: Fitting ring (Order-nr. 47765000)
- 3: Non-return valve (Order-nr. 47753000)
- 4: Repl. kit f. seal (Order-nr. 48263000)
- 5: Socket spanner (Order-nr. 19332000)\*
- 6: Safety combination (DIN EN 1717) (Order-nr. 29007000)\*
- 7: Thermostatic compact cartridge 3/4" (Order-nr. 47186000)\*

\* Optional accessories